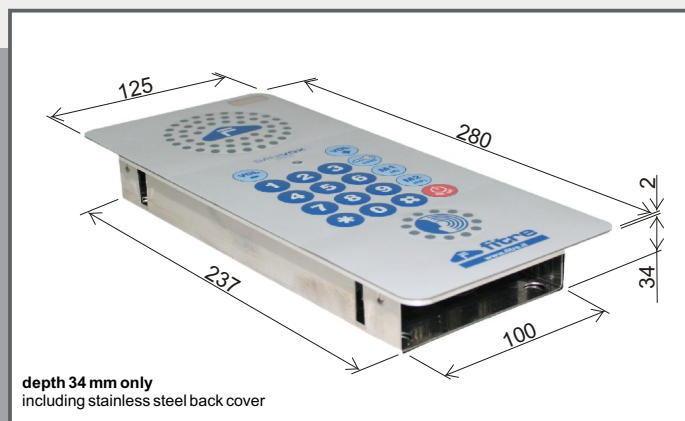


“SANIVOX” series for Hospitals, Chemical and Pharmaceutical Labs, Food Plants, White Rooms, etc.

Code 7133630

SANIVOX 918 S analog PSTN hands-free telephone set for **Clean Rooms and Surgeries**, flush mounting, weatherproof IP66:

- frontal surface coated by a robust membrane totally hole-free and totally washable with standard detergents or bactericide products
- **depth 34 mm only**, including stainless steel back cover
- totally powered by standard analogue telephone lines, both from trunks or from PBX subscriber lines
- hands-free full duplex conversation
- built-in bell, adjustable up to 86dB at 1m
- auto-answer facility after a programmable number of rings (00 to 99)
- autohooking when the caller hangs-up
- LED for signalling the incoming call
- teleprogrammable, through password, from any local or remote DTMF telephone set or from a remote center like the FITRE_CTM, that FITRE can supply on request, even later



Note: the shown holes are not real, but just painted on the hole-free frontal surface

- **with 18 push buttons keyboard**, including the standard **12 dialling push buttons** and **6 function push buttons**:
 - **ON-OFF**for initiating or closing a call
 - **CODE**for inserting the secret codes for driving 1 or 2 optional relays (e.g. "OPEN DOOR")
 - **M1**for calling a first preprogrammable number
 - **M2**for calling a second preprogrammable number
 - **VOL"+**to increase the speaker volume
 - **VOL"-**to reduce the speaker volume

Other models available

The **SANIVOX** telephone set can be supplied with other combination of keys and with customized graphics.

VoIP models are also available

NOTE - If requested the M1 and M2 push buttons can be programmed for making the function of **R - RP** (Flash-Redial)

OPTIONS: see SANIVOX accessories.

SANIVOX series accessories

Code 7133060

Protruding case, inox, washable, specially for SANIVOX phone as alternative to the flush mounting installation. Dimensions: 135x290x36 mm

Code 8131931


Wall flush mounting box for SANIVOX telephone set. This box is not necessary for mounting SANIVOX on metal or plastic panels or sandwich panels


Code 7133644


Optional booster amplifier card for very noisy areas for potentiating the telephone built in loudspeaker signal or for driving an external additional loudspeaker; powered by external source 12Vdc-300mA (not included).


Code 7133676

Plug in card with 2 relays (e.g. for opening doors, switching lights, etc.) controlled by a remote telephone set or by the same SANIVOX (code 7133630) through specific programmable secret code; output on one switch over contact for each relay, with power rating (on resistive charge) 250mA/24Vdc or 500mA/230Vac; possibility of activating automatically one relay when a call starts till to the automatic hanging up of the same (for switching-on external signals, cameras or other devices).


TECHNICAL SPECIFICATION

Bell's strength (@70V_{RMS} - 25Hz)	>86dB(A) @ 1m
Operating temperature	-20°C to +55°C
Storing temperature	-40°C to +70°C
Internal unit Relative Humidity	upto 99% (non condensing)
Protection degree	IP66 on front face panel (IEC144)
Designed according to the European standards	TBR38 and EN301.437
DTMF dialling	100ms ITU-T Q23
CE mark	according to R&TTE Directive 1999/5/EC


CTM

System for telemaintenance from a remote station and for monitoring FITRE telephone sets series SANIVOX (and other), with Password protection.

CTS

System for tele-rescue from a Call Center for the management of the calls coming from FITRE telephone sets series SANIVOX (and other).

