



GE  
Security

## Product Data Sheet

### RF425I4

EV425 PIR 433 MHz



#### Standard Features


- "Step & Gliding Focus Multi Curtain" mirror optic
- ASIC with "4D" processing
- Additional Bi-curtain processing for harsh environment
- No adjustment required for different mounting heights
- Learn-Mode Technology

# RF425I4

EV425 PIR 433 MHz

## Specifications

Detection range	16 m
Undercrawl protection	Yes
Detection range selection	16 m or 9 m
Coverage field of view	86° with 9 curtains
Coverage pattern selection	Blinders and curtain labels
Mounting height	1.8 to 3.0 m
PIR process mode	Standard / Bi-curtain
Ambient conditions	-10 to +55°C; 95% relative humidity
Battery type	1 x 3.6V Lithium
Battery lifetime(typical)	5 years
Operating Frequency	433 MHz
Open-air range	400 m
Dimensions (W x H x D)	71 x 103 x 51 mm

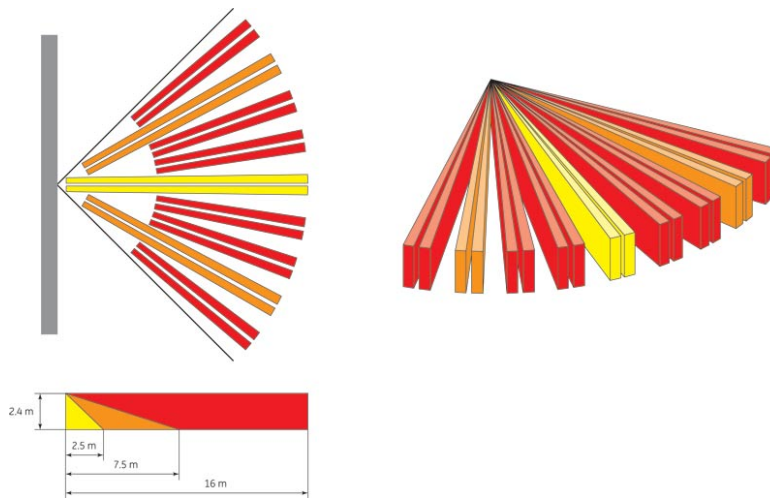

## Ordering Information

Part No.	Description
RF425I4	EV425 PIR 433 MHz
RF425I4PI	EV425 PIR RF 433 MHz Pet immune
DL123A	3 V Lithium battery Duracell DL123A (unit)



[www.gesecurity.net](http://www.gesecurity.net)